


Shenzhen Richmor Technology Development CO.,Ltd is a global and professional MDVR/MNVR manufacturer and solution provider specialzing in vehicle monitoring system design and deployment for over 10 years

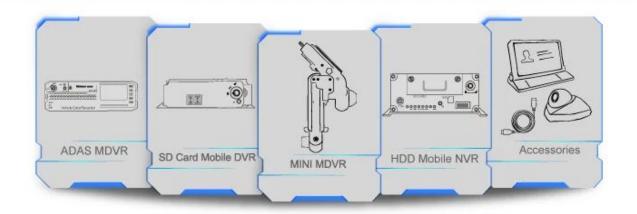

COMPANY INFORMATION

Company Introduction

Shenzhen Richmor Technology Development CO.,Ltd is a global and professional MDVR/MNVR manufacturer and solution provider specialzing in vehicle monitoring system design and deployment for over 10 years




High quality million AHD mobile DVR with $% \mathcal{A} = \mathcal{A} = \mathcal{A} + \mathcal{A} +$







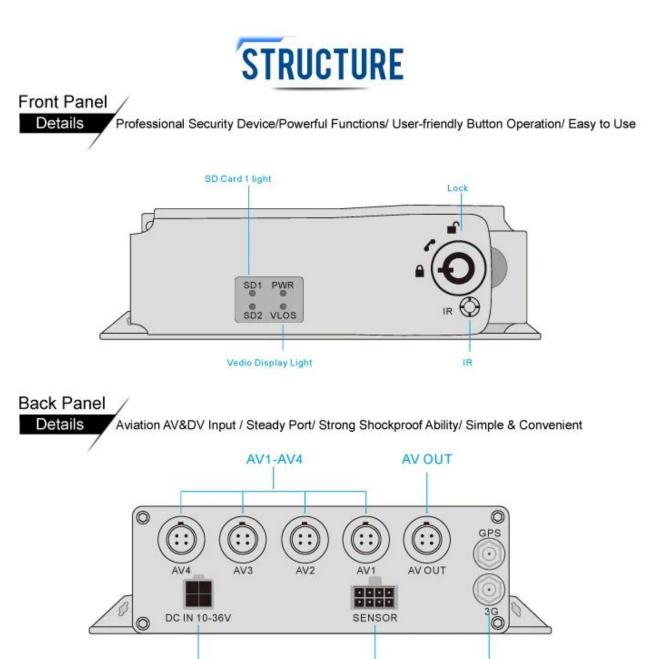

DC IN

DETAILED SPECS

SENSOR

3G


FUNCTION DISPLAY



Mobile Monitoring Management Platform

RMVS is a system of centralized management and monitoring of all kinds of vehicles based on wireless network. Perform real-time monitoring, GPS/BD positioning, video storage, vehicle scheduling, alarm and alarm, etc.



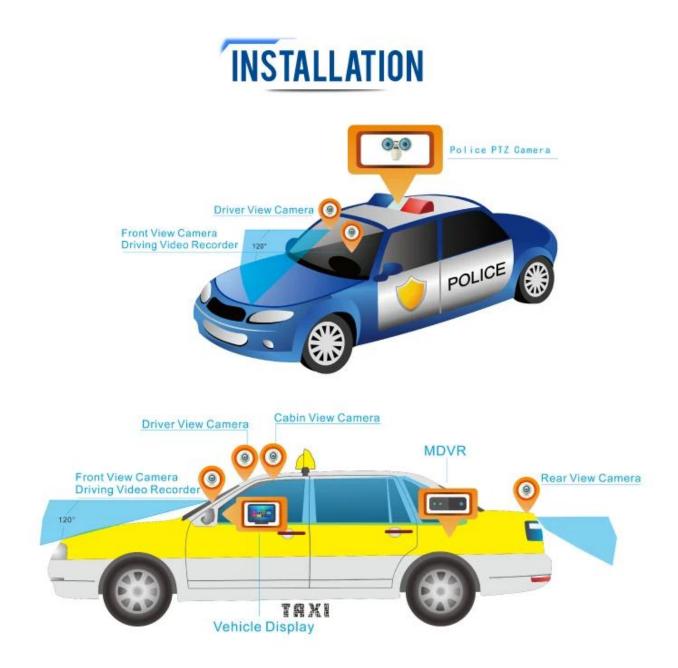


DEVELOPMENT HISTORY



Detailed

High quality million AHD mobile DVR with wide voltage 4CH 3G 4G wifi MDVR for car van trunk

Item		Parameter
os		Linux
Video Compression		H.264
Operation Interface		OSD menu
	Video Input	Support 4 channels Full real-time AHD 720P
	Video Output	1 channel composite video output
Video Reco	rd Display	1/2/4 channels full screen
System	Signal system	PAL/NTSC (PAL @100Frame, NTSC@120 Frame
	Resolution	Support 4 channels Full real-time AHD 720P
	Record Format	Synchronized A/V recording
	Audio Input	4 Channel
Audio	Audio Output	1 channel
	Compression	G.726
	Input	4 channels
Alarm	Output	1 channel
Storage		Up to 256GB, 128GB for each
Communication Port		1CH RS232 / 1 channel RS485
G-sensor		Built in, support 3 Axis Motion Detection with user set
		ranges , for X,Y and Z coordinates
Wireless communications		GPS /3G /4G /WIFI optional
GPS		GPS /Glonass
Video Playback	Video Search	Search video by Record Time/ Type etc
	Playback	A/V,GPS,Mapview,Speed,G-sensor,video files available for
		playback on PC.
	CMS	Wireless(require Wi-Fi or cellular), real-time monitoring
		.GPS and alarm etc
Operating Voltage	Voltage Input	8V ~ 36V DC
	Voltage Output	12V @1.2A 4channels, with I2V @0.9A 2channels, with IR
	Power -off Protection	All video information can be saved automatically when the
		power cut off, and make sure that all the files can not be
		damaged
	UPS	External UPS battery optional, support 24 hours
		monitoring
Other	Operation Temperature	$-40^{\circ}\mathrm{C} \sim + 70^{\circ}\mathrm{C}$
	Humidity	20% ~ 80%
	Dimension	112*36*138mm
	Weight	360g

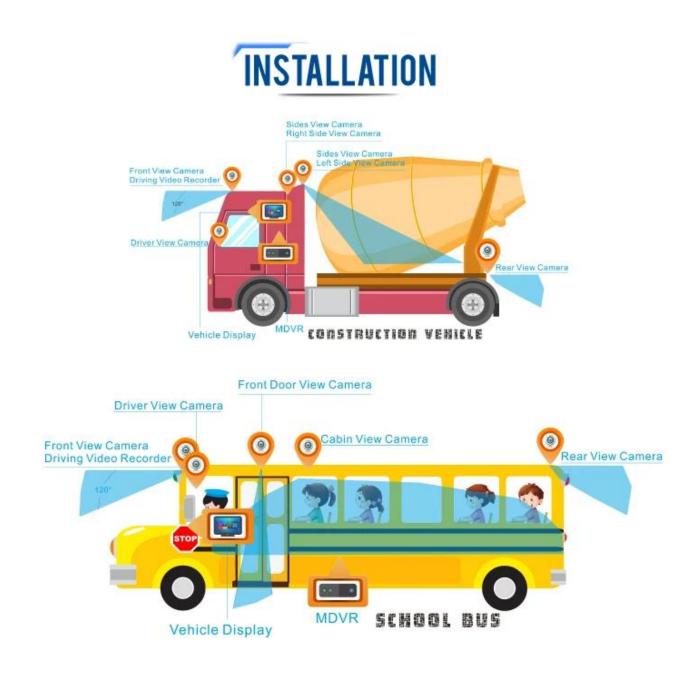

Shenzhen Richmor Technology Development CO.,LTD [100% OEM Manufacturer, Quality Assured, Price Competitive]

Contact: Linda Huang Mob/whatsapp:+86 18126263832 Skype:rcmcctvsales7 Website:http://www.mdvrchina.com Company Add: 5th Floor, D building, Bantian International Center, Bantian, Longgang District, Shenzhen, China

SEND US INQUIRY !!!